


<b>Boat Covers</b>	Taylor Made Boat Covers	899 - 901
	Attwood Boat Covers	900
<b>Trailer</b>	Tiedowns	901 - 902
	Trailer Jacks	904
	Boat Stands	905 - 906
	Trailer Winches	907 - 909
	Trailer Lights	909 - 913
	Trailer Electrical Accessories	914 - 915
	Trailer Rollers	916 - 917
	Trailer Parts	917 - 921
	Trailer Security	922 - 926
	Launching Wheels & Dollies	927
Keel Guard	928	
<b>Lettering</b>		929
<b>Totes</b>		929

## Trailerite Semi-Custom Covers

Taylor Made Products semi-custom boat covers are designed to fit several makes and models of boats with the same hull style. Windshields and other features such as trolling motors are in the average position of the most popular makes and models for that range of boats. Your boat may differ.

Covers are designed to finish 4-6" below the rub rail. Poly-cotton covers come with large diameter shock cord sewn into the hem. Open or closed bow (fits integrated swim platforms and square transoms).

To select the correct Trailerite Boat Cover for your boat, you must know the beam and centre line length of your boat. Match these dimensions to your boat style and features to determine the appropriate part number.

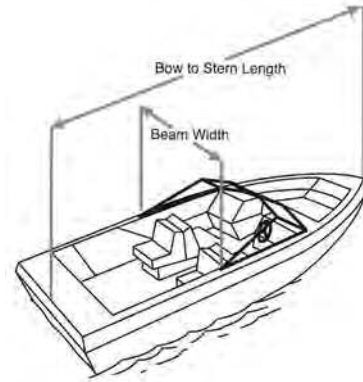

### Taylor Made V-Hull Runabouts

- Trailerite 10 oz semi-custom Poly-Cotton covers
- Gray in colour
- Bow rails under 6"
- Low profile accessories
- Bound in motor hoods



Outboards	Stern Drives	Centre Line	Beams To
TAY 71214	-	13' 5" - 14' 4"	73"
TAY 71215	-	14' 5" - 15' 4"	81"
TAY 71223	-	15' 5" - 16' 4"	86"
TAY 71224	TAY 71724	16' 5" - 17' 4"	90"
TAY 71225	TAY 71725	17' 5" - 18' 4"	96"
TAY 71226	TAY 71726	18' 5" - 19' 4"	96"
TAY 70220	TAY 70720	19' 5" - 20' 4"	102"
-	TAY 70721	20' 5" - 21' 4"	102"
-	TAY 70722	21' 5" - 22' 4"	102"
-	TAY 70723	22' 5" - 23' 4"	102"

### Taylor Made Inshore Fishing Boats

- Trailerite 10 oz semi-custom Poly-Cotton covers
- Gray in colour
- Boston Whaler style
- Centre console
- Bow rails
- Windshield
- Bound in motor hood



Part #	Centre Line	Beam To
TAY 87201	12' 5" - 13' 4"	66"
TAY 87202	13' 5" - 14' 4"	72"
TAY 87204	15' 5" - 16' 4"	80"
TAY 87205	16' 5" - 17' 4"	88"
TAY 87206	17' 5" - 18' 4"	90"

### Taylor Made V-Hull Fishing Boats

- Trailerite 10 oz semi-custom Poly-Cotton covers
- Gray in colour
- Pedestal seats
- Low profile trolling motors
- Reinforced bow and transom corners
- Fits without windscreen



Motor Hood	No Motor Hood	Centre Line	Beams To
TAY 87012	TAY 87112	11' 5" - 12' 4"	66"
TAY 87013	TAY 87113	12' 5" - 13' 4"	72"
TAY 87014	TAY 87114	13' 5" - 14' 4"	72"
TAY 87015	TAY 87115	14' 5" - 15' 4"	75"
TAY 87016	-	15' 5" - 16' 4"	75"
TAY 87017	-	16' 5" - 17' 4"	75"

### Taylor Made Cuddy Cabin Boats

- Trailerite 10 oz semi-custom Poly-Cotton covers
- Gray in colour
- 6-18" bow rails
- Forward decks
- Reduced cockpit
- High windshields
- Fits single outboards



Stern Drives	Centre Line	Beams Up To
TAY 72720	19' 5" - 20' 4"	102"
TAY 72723	22' 5" - 23' 4"	102"

### Taylor Made Ski Boat

- Trailerite 10 oz semi-custom Poly-Cotton covers
- Gray in colour
- Low profile boats with minimal freeboard
- Open cockpit
- Low or no windscreen
- Unobstructed flat decks
- Sewn in motor hood



Part #	Centre Line	Beam To
TAY 76216	15' 5" - 16' 4"	102"

### Taylor Made Bay Style V-Hull Centre Console Boats

- Trailerite 10 oz semi-custom Poly-Cotton covers
- Gray in colour
- V-hull shallow draft hulls
- High centre consoles with windshields
- Low or no bow rails
- Bound in motor hoods



Part #	Centre Line	Beam To
TAY 70747	17' 5" - 18' 4"	102"
TAY 70749	19' 5" - 20' 4"	102"

### Taylor Made Inflatable Sport Boats

- Bound in motor hood
- Designed to go over the outboard



Part #	Centre Line	Beam To
TAY 73001	8' 5" - 9' 4"	60"
TAY 73002	9' 5" - 10' 4"	66"
TAY 73003	10' 5" - 11' 4"	68"
TAY 73004	11' 5" - 12' 4"	70"
TAY 73005	12' 5" - 13' 4"	74"
TAY 73006	13' 5" - 14' 4"	74"
TAY 73007	14' 5" - 15' 4"	76"
TAY 73008	15' 5" - 16' 4"	76"

### Attwood Snug Harbor Trailing Boat Covers



Constructed of colour fast, waterproof, silver 150 denier polyester for general trailering and storage. This economical cover features tie-down loops above the gunwale and an adjustable elastic cord that runs the full length of the hem. Every cover has 1/2" poly webbing sewn across each cross seam for extra strength against wind velocity and to provide additional strength at the tie-down points. Comes packaged in a zip-up see-thru bag with carry handle.

Part #	Boat Type	Centre Line	Beam To
ATT 10450	V-Hull Fishing	14' - 16'	68"
ATT 10451	Fish, Ski & Bass Boat	16' - 18'6"	94"
ATT 10452	Tri-Hull Runabouts	14' - 16'	90"
ATT 10453	V-Hull Runabouts	17' - 19'	96"
ATT 10454	V-Hull Runabouts	19' - 21'	105"
ATT 10455	V-Hull Runabouts	21' - 23'	105"

### Taylor Made 2-Bow Bimini BoatTops for Small Fishing Boats and Inflatables

All sizes are 42" high and 5' 6" long. Ideal for small fishing boats - offers boaters protection against sunburn. These tops are to be used only when your boat is anchored or drifting, not while the boat is under power.

TAY 62153OG	49" to 57"
TAY 62161OG	58" to 66"
TAY 62171OG	67" to 75"



### Taylor Made Motor Covers

Poly-Cotton outboard motor covers have been redesigned to better fit the newer cowl sizes and later model engines. Simply measure your outboard and determine those dimensions that most closely match your particular model



Part #	Dimensions (LxWxH)	Approximate Engine Size
TAY 926112	11" x 11" x 16"	2-15 h.p.
TAY 926113	15" x 12" x 24"	15-45 h.p.
TAY 926114	19" x 14" x 27"	45-85 h.p.
TAY 926115	25" x 17" x 25"	85-115 h.p.
TAY 926116	30" x 18" x 25"	115-125 h.p.

### Taylor Made Poly Cotton Repair Kit

If you have a torn cover as a result of sharp corners, you can repair it with our deluxe poly/cotton repair kit. One square yard of fabric is supplied with a four ounce bottle of specially designed fabric glue for easy attachment to your cover.



TAY 67680

**Taylor Made Quick-On Tie-Down Kit**

Boat Cover TieDown Strap "QuickClip" - Holds even pressure on tie down loops - Makes for a simple and secure way to attach tiedown straps to boat cover. Works on all 1" webbing loops and buckles.

Attaches to almost any boat cover.

- Durable quick release buckle
- Sun resistant polypropylene webbing
- Includes NEW locking Quick Clip

TAY 55742 2 pack, 8'  
TAY 55748 8 pack, 8'



**Taylor Made Super Support Pole**



This fully adjustable support pole is 3 support poles in one! We supply a male canvas snap, a grommet tip, and a plain end cap. So, if you have a female canvas snap or a grommet on your boat cover, you can get a support that will work with your cover. The pole is aluminum, with a durable plastic adjuster to set the correct height for your cover. Also comes in a 3-piece pole that collapses down to 22" for easy storage.

TAY 11992 36" to 64"

**Taylor Made Adjustable Boat Cover Support Pole**

Extend the life of your boat cover by preventing water from pooling on top. Our standard boat cover support pole has a non-marring tip on each end of a telescoping aluminum tube. A durable plastic knob allows for easy adjustment of the height.



TAY 11991 36" to 64"

**Taylor Made Boat Cover Support System**

Extend the life of your boat cover by preventing water from pocketing. The system includes 50 feet of webbing, quick release buckles, a boat cover support pole that snaps to the webbing, and two hooks to attach to the transom.



TAY 55741

**Garelick Boat Cover Support Pole**



- Keeps weather covers tight
- Eliminates pockets that trap water
- Twist to lock & unlock; telescopes to desired length
- Three style tips - rubber, pin for grommets, dot fasteners - Snap on
- Anodized aluminum resists corrosion
- 30" to 60"

GAR 94320

**Sea-Dog Deck Mount Bow Socket**

Recessed base design allows for a water tight seal without the use of gaskets.

SED 327410-1



**Sea-Dog Rail Mount Bow Socket**

Designed to fit snugly on a 7/8" round rail without the use of fasteners. The rail mount bow sockets aid in assembling a rounded support structure for a cover and can be easily removed from the boat when the cover is not in use.

SED 327400-1



**Gator Tuff Transom Tie Downs**

Wide weather-resistant polypropylene webbing, heavy duty vinyl coated black hook, zinc plated 'S' hook and hardware. Easy-lock over centre painted buckle with hook and loop pad to protect surfaces and secure loose ends.

- Max load: 800 lbs

EPC PTTD-2 2" x 2', 2/pkg  
EPC PTTD-4 2" x 4', pair



**Gator Tuff Transom Tie Downs**

Wide weather-resistant polypropylene webbing, heavy gauge zinc plated hardware and self-tightening, easy-lock over centering buckle with hook and loop pad to protect surfaces and secure loose ends.

- Max load: 1200 lbs

EPC BTDT-2 2" x 2', 2/pkg  
EPC BTDT-4 2" x 4', 2/pkg  
EPC BTDT-6 2" x 6', 2/pkg



**Gator Tuff Transom Tie Downs w/ Vinyl Pads**

Wide weather-resistant polypropylene webbing, heavy gauge zinc plated hardware and vinyl coated hooks. Easy-lock over centering buckle with large coloured vinyl pad to protect surfaces, hook & loop to secure loose ends.

- Max load: 1200 lbs

EPC BTDTP-2 2" x 2', 2/pkg  
EPC BTDTP-4 2" x 4', 2/pkg



**BoatBuckle Transom Tiedown - Retractable**

This retractable transom tie-down features a self-storing retractable 2" wide strap which can be extended to a full 48" with a high impact boot and protective plastic coating on the S hook. The ratchet snugs tight with an easy one hand operation. Submersible and water resistant. Sold in pairs.

BOB F08893 2/pkg



**Boatbuckle S/S G2 Transom Tie-Down - Retractable**

Retractable transom tie-down

- Sleek contour styling
- Comfortable SUR-Grip rubber coated handle and release lever
- One-touch web release
- Strong-3,000 lb./pair rated capacity
- Easy access dual release lever
- Simple, one hand operation
- Adapts to any mounting

**BOB F14256** 2/pkg



**Gator Tuff Transom Tie Down - Retractable**

- Permanently mounted to your trailer
- Mounting bolts included
- Easy lift release
- Rubber grip handle
- Spool mode

**EPC 415** 48", 2/pkg



**EpcO Transom Tiedown**

4" stainless adjustable transom ratchet. 1" wide weather-resistant nylon webbing, vinyl coated hooks, stainless quick release and rapid ratchet mechanism for tightening the strap.

- Max load: 1200 lbs

**EPC TR-4S** 1" x 4', 2/pkg



**Gator Tuff Gunwhale Tie Down**

Wide nylon webbing, heavy gauge zinc plated hardware, captive 'J' hook. Self-tightening, easy-lock over centering buckle with hook & loop pad to protect surfaces and secure loose ends.

- Max load: 1200 lbs

**EPC BTD0P** 2" x 10', 2/pkg  
**EPC BTD3P** 2" x 13', 2/pkg  
**EPC BTD6P** 2" x 16', 2/pkg



**Gator Tuff Ratchet Strap**

- Stainless ratcheting handle
- 4000 lbs test webbing
- Stainless 3/8 flat 'J' hooks

**EPC R15S** 1" x 15', 2/pkg



**EpcO Utility Tiedowns**

- 1-1/4" x 16' tiedowns with rubber coated ratchets and hooks
- 100% polyester straps
- Rated capacity: 2,500 lbs

**EPC R66033** 1-1/4" x 16', 2/pkg



**Gator Tuff Ratchet Cam Buckle**

- High strength-low elongation, 100% polyester, for maximum cut and abrasion resistance
- 2 x 15' ratchets with rubber padded handle
- 2 x 6' cambuckles also rubber coated

**EPC R66525**



**Gator Tuff Winch Straps**

Wide nylon webbing with heavy duty snap hook, zinc plated to resist weathering. Winch strap comes with or without sewn loop on the end.

- 2" x 20'
- Max load 4000 lbs

**EPC WSL20N** Looped end, each  
**EPC WS20** Standard, each



**Fulton Winch Straps**

- Nylon web 2" winch strap with hook
- 2,600 lb maximum working load

**FUL WS20 0700** each



- Heavy duty 2" winch strap and hook
- 10,000 lbs breaking strength

**FUL WS20HD0600** each

**Gator Tuff Gator Skin**

A long lasting protective panel made of high durability plastisal designed to protect boat finish. The Gator Skin safeguard cushion is easy to use, just slide strap through slits provided on cushion for adjustable protection anywhere on the strap. Fits webbing 1", 1 1/2", & 2"

**EPC PAD-2** Orange, 2/pkg



MEGAWARE

# KEELGUARD®

**PROTECT YOUR CUSTOMERS INVESTMENT  
AND INCREASE YOUR PROFITS**



**Save your boat keel from  
Sand, Rock & Concrete**

Ultra-Tough Polymer Composite • 3M Adhesive • Lifetime Warranty



Multiple color options

MEGAWARE

## SKEGPRO™

SAVE YOUR SKEG

**PROTECT AGAINST RAMP DRAGGING  
AND HIDDEN DEBRIS**



304 Stainless Steel

- A model for most skegs
- Installs in minutes
- Mirror-Polished
- No discernable drag



Without SkegPro

MEGAWARE

## FLEXSTEP™

ADJUSTABLE TRAILER STEP



**EASY BOAT ACCESS**

- 5 ADJUSTABLE ANGLES
- EXTENDS & RETRACTS
- REMOVABLE FOR SAFE TRAVEL & STOWING
- 300 LB. WEIGHT CAPACITY
- LIGHTWEIGHT ANODIZED ALUMINUM



EASY ACCESS TO TACKLE  
BOX AND STORAGE



ATTACHES TO TRAILER  
TONGUE FOR EASY ENTRY

VERSATILE

# THE ONE FOR THE ROAD



## Trailerite BOAT COVERS

**Fully  
Trailerable!**

### Semi-Custom Covers

- 35 different hull styles
- Fully Trailerable
- Fit in one-foot increments to a specific beam width and motor type.
- Over 3,800 fit and fabric color combinations
- Available in 2 different fabrics:
  - Poly-Cotton (10 oz. gray only) 2 year warranty
  - Hot Shot™ (6.25 oz. polyester) 5 year warranty
- Hot Shot™ fabric available in 7 different colors

### Fabric Grades:

#### Poly/Cotton

- 10 oz. 60/40 - Polyester/Cotton blend
- Gray color only
- Best for breathability
- Great strength

#### Hot Shot™

- 6.25 oz. Acrylic Coated Polyester
- Available in gray, navy, cranberry, hunter green, blue, teal and black
- Superior mildew and water resistance
- Excellent strength and U.V. resistance

#### Ultima™

- 7 oz. Urethane Coated Polyester
- Available in gray, navy, cranberry, hunter green, blue, sand and black
- Superior mildew and water resistance
- Unmatched strength and U.V. resistance

### Custom Covers

... Covers that fit your boat RITE!

- Fits specifically to the year, make, model and options of the boat
- Fully Trailerable
- Over 30,000 fit and fabric color combinations
- Available in 3 different fabrics:
  - Poly-Cotton (10 oz. gray only) 2 year warranty
  - Hot Shot™ (6.25 oz. polyester) 5 year warranty
  - Ultima™ (7 oz. polyester) 5 year warranty
- Hot Shot™ and Ultima™ fabric available in 7 different colors

**The ONLY Canadian  
Drop-Ship Cover Program  
Taylor Made for Dealers!**

**Price includes  
Duty, Brokerage  
and Freight!**

Semi-Custom and Custom Covers can now be drop-shipped directly to you, the dealer, in 7-14 days from receipt of cover order at Taylor Made.

This program now allows you to offer Taylor's assortment of color and fabric combinations in Semi and Custom Covers with NO STOCK!

**LED  
LIGHTS**  
**Wesbar**



**F2**  
**FULTON**



**from**

THE BEST-IN-CLASS TRAILER PRODUCTS LEADER  
CEQUENT PERFORMANCE PRODUCTS, INC.

**Fulton Eclipse Economy Swivel Tongue Jacks**

Fast, easy swivel jack operation; factory assembled mounting bracket provides for quick and easy trailer installation. Provides up to 10" of travel. Heavy zinc plated steel tubing. Grease nipple for gear lubrication. Fits trailer tongues up to 3" x 5".

- FUL EJ1000-0101** 1000 lb
- FUL TJ1200-0101** 1200 lb



**Fulton Swivel Tongue Jacks**

Fast, easy swivel jack operation; factory assembled mounting bracket provides for quick and easy trailer installation. Heavy duty zinc plated steel tubing. Fits trailer tongues up to 3" x 5".

- FUL XP10-0101** 1200 lb, bolt-thru, 6"
- FUL XP15-0101** 1500 lb, bolt-thru, 8"




The strongest bolt-thru swivel mount in the industry. Patented mount uses 3-D formed heavy gauge steel stamping and a proprietary bushing material for a mount with minimal deflection and maximum support. This design allows us to offer the industry's only 1500 pound capacity caster jack with dual 6" rally wheel for easier casting.

- FUL XPD15L-0101** 1500 lb, bolt-thru

Part #	A		B	Wheel Dia
	Min	Max		
<b>FUL TJ503-0101</b>	12.75"	22.75"	10.5"	6"
<b>FUL XP10-0101</b>	12.75"	22.75"	10.5"	6"
<b>FUL XP15-0101</b>	12.75"	22.75"	12.5"	8"
<b>FUL XPD15L-0101</b>	12.75"	24.75"	12.5"	Dual 6"

Parts:

- FUL 6811-S00** 6" wheel kit
- FUL 0933301-S00** Handle kit, XP10
- FUL 0933305-S00** Handle kit, XP15
- FUL 0933306-S00** Bevel gear kit
- FUL 0951501-00** 2" Cap, pre 1996
- FUL 1636-S00** Handle kit, TJD1250
- FUL 1537-S01** Plunger kit, XP10/TJ503
- FUL 1640-S00** Handle kit, XP10/TJ503
- FUL 0933302-S00** Gear repair kit, XP10
- FUL 0917515-00** Replacement cap XPD15L

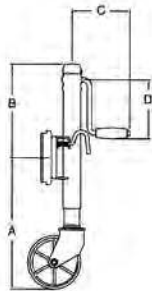

**Fulton Integrated Footplate Kits**

- Converts wheeled jack to a dual purpose wheeled footplate jack
- Increased surface area of footplate minimizes sinking on soft surfaces
- Built-in, secure stowed position
- Includes all mounting hardware
- For use on most marine jacks with 6" or 8" single wheels



- FUL 141030-0601** 6"
- FUL 141040-0601** 8"

**Fulton F2 Performance Trailer Jacks**

Precision extruded aluminum alloy inner and outer tubes combined with twin alignment bushings for a smooth and precise fit. Adjustable to any height. Integrated pull pin with an ergonomic grip for simple, quick and easy positioning.

- 10" screw travel
- 8" mount travel
- 9/16" pull pin diameter
- 1600 lb capacity

Twin track 7" diameter wheels roll independently for easy turning. The 5-1/2" total wheel base adds superior stability.

- FUL 1413-02-0134** Twin



Single 8" diameter, 3" wide wheel provides a sturdy working platform.

- FUL 1413-04-0134** Single

Parts:

- FUL 500130** Twin replacement wheel kit (Includes 2 wheels & all necessary mounting hardware)
- FUL 500131** Single replacement wheel kit (Includes 1 wheel & all necessary mounting hardware)
- FUL 500138** Twin track wheel only
- FUL 500139** Wide track wheel only
- FUL 500134** Handle/crank kit



**Fulton F2 Fixed Jack w/ Footplate**

- 2,000 lb capacity
- HD 7" articulating cast footplate
- 13" of swivel mount height adjustment
- Sidewind handle with hold-up feature
- 10" screw travel
- 9/16" pull pin
- Bolt on for 4" & 5" frames

- FUL 1413-23-0134**



**Fulton Fixed Jack w/ Footplate**

- High strength, high lift, fixed mount jacks
- Zinc plated, high strength, steel square tube, drop foot trailer jacks
- A 5/8" pin allows for quick height adjustment
- 4" x 6" foot plate
- Zerk fitting allows ease of gear train lubrication
- All necessary hardware is included for quick installation with common hand tools
- Fits on trailer tongues up to 3" x 5"
- Side wind handle




Part #	Min	Max	Clearance	Max Load
<b>FUL HD2500-0101</b>	7.50"	35.50"	19.00"	2500#
<b>FUL HD5000-0101</b>	6.50"	35.00"	18.50"	5000#

**Brownell Adjustable Boat Stands**

These strong, steel, adjustable stands eliminate the need for cumbersome cradles and wooden shoring. Use wooden keel blocks to support the weight of the boat and Brownell stands to stabilize. The stands nest together making storage easy.

**Sailboat Stands**

Part #	Min / Max Height	Length / Top	Weight
BBS SB-1FL	64" / 81"	27" Flat	54 lbs
BBS SB-2FL	48" / 65"	27" Flat	46 lbs
BBS SB-3FL	35" / 52"	27" Flat	39 lbs
BBS SB-4FL	23" / 37"	22" Flat	30 lbs
BBS SB-1V	64" / 81"	27" Vee	54 lbs
BBS SB-2V	48" / 65"	27" Vee	46 lbs
BBS SB-3V	35" / 52"	27" Vee	39 lbs
BBS SB-4V	23" / 27"	22" Vee	30 lbs

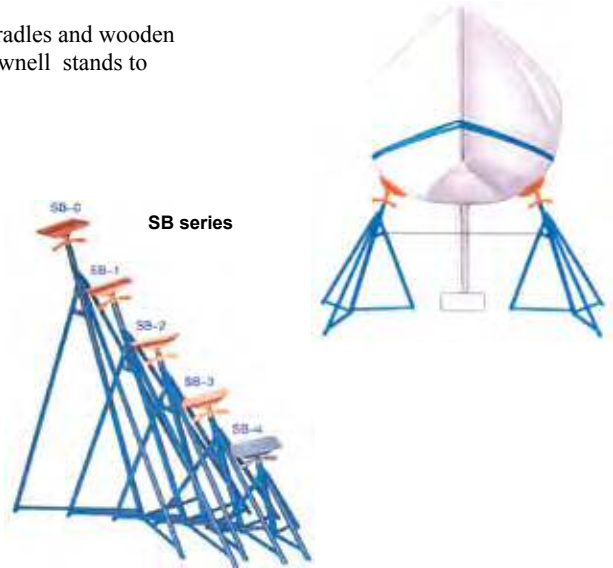

**Motorboat Stands**

Part #	Min / Max Height	Length / Top	Weight
BBS MB-0XFL	54" / 72"	27" Flat	46 lbs
BBS MB-0FL	41" / 58"	27" Flat	39 lbs
BBS MB-1FL	33" / 50"	27" Flat	38 lbs
BBS MB-2FL	29" / 46"	27" Flat	37 lbs
BBS MB-3FL	25" / 38"	22" Flat	34 lbs
BBS MB-4FL	18" / 25"	16" Flat	37 lbs
BBS MB-1V	33" / 50"	27" Vee	38 lbs
BBS MB-4V	18" / 25"	16" Vee	21 lbs



Tops Only	Length	Top Style
BBS VEE TOP-16	16"	Vee
BBS VEE TOP-22	22-1/2"	Vee
BBS VEE TOP-27	27-1/2"	Vee
BBS FLAT TOP-16	16"	Flat
BBS FLAT TOP-27	27-1/2"	Flat
BBS O-PLY	Orange top only	



**Bow / Stern Boat Rack Stands**

• Load rated: 13,000 lbs per set








Part #	Type	H x W x D	Weight
BBS BRB	Bow	24.5" x 30" x 36"	68 lbs
BBS BRS36	Stern	36" x 30" x 31"	70 lbs
BBS BRS41	Stern	41.5" x 30" x 31"	76 lbs




**Keel Stands**

Part #	Min / Max Height	Top Style	Weight
BBS K-3	24" / 30"	Flat	35 lbs
BBS K-4	16" / 24"	Flat	22 lbs



  		<h3>Brownell Maxi Stands</h3>  <ul style="list-style-type: none"> <li>• Larger stands now available for boats with drafts up to 15'</li> </ul> 
<h3>Brownell Boat Racks</h3>   <ul style="list-style-type: none"> <li>• For use with forklifts, hydraulic trailers or other hoists</li> <li>• Ideal for wash downs and service at dry stack facilities, dealers, etc.</li> <li>• Fast, efficient and stores compactly when not in use</li> </ul>	<h3>Brownell Keel Stands</h3>   <ul style="list-style-type: none"> <li>• Replaces traditional wood blocking</li> <li>• Reduce labor &amp; increase efficiency – typical savings of 15 to 20%</li> </ul>	
<h3>Brownell Staging Stands</h3>   <ul style="list-style-type: none"> <li>• Safe, stable un-obstructed work platform</li> <li>• Nest or collapse for compact storage</li> <li>• Fast, efficient height adjustment</li> </ul>		

### Professionals have chosen Brownell for reliability and profitability since 1954

- Sizes to accommodate virtually any vessel
- Store more boats per square foot – increase your revenue
- Made in USA with North American Steel 
- Shore up boats securely and quickly
- Stack for efficient storage

[www.boatstands.com](http://www.boatstands.com)



### Do and Don't list

The following is a list of Do's and Don'ts to insure that safety is not being compromised. This list should in no way be construed as totally complete to all users of boat stands due to the infinite variables of application, but rather should be in addition to safety precautions already taken.

- 1) Do not use boat stands to suspend a boat in mid-air.
- 2) Use blocking along center line of the boat to rest all the weight on.
- 3) Use the safety chains on all side sailboat stands, chaining the pairs together from port to starboard.
- 4) Never allow anyone other than qualified, experienced, or authorized persons to move or adjust boat stands when in use.
- 5) Use a pair of boat stands, one placed port and one placed starboard for each 8' of boat's length.
- 6) Use extra boat stands when used for fin keel and/or bow-heavy sailboats.
- 7) Never allow anything (such as canvas) to be tied to the boat stand.
- 8) Use boat stands on firm, stable ground.
- 9) In windy or open areas, remove masts when boats are placed on boat stands.
- 10) Apply boat stands so the adjusting screw is as perpendicular to the hull as possible when they are outboard.
- 11) Replace any boat stand that is damaged or rusted badly.
- 12) Keep screws greased.
- 13) If it is necessary to remove a boat stand from under a boat, place another boat stand beside it first.
- 14) Do not use boat stands for jobs they were not intended for.
- 15) Do not use boat stands to hold boats up when in transit (i.e. on a truck or trailer).
- 16) If boats are left on boat stands unattended for a long time, they should be checked for security and locked.
- 17) Use plywood under boat stands if the ground is soft.
- 18) Use a V-stand under the bow of all fin keel sailboats.
- 19) Use a V-stand under the stern of stern heavy or fin keel sailboats.
- 20) Do not place blocks on top of boat stands to increase their reach.

**Fulton Trailer Winches**

Comfort grip handle for a positive hold while cranking. Zinc plated finish offers superior corrosion resistance even in salt water environments. Winch drums are drilled for use with winch straps. High carbon SAE 1050 steel gears to resist wear and last longer. Heavy duty rib reinforced frames maintain proper gear alignment for longer life. Internally lubricated drum bushings and oil impregnated shaft bushings provide permanent lubrication to keep the cranking easy. Each model is engineered with mechanical advantages to keep handle effort low for smooth, easy operation.

**Single Speed Trailer Winches**

The easy to use "grabber" one-way ratchet, free wheels in off position on T600 and T900. Easy to use two-way ratchets bring the rope into either the top of drum, or the bottom to hold bow of boat down on T1100 through T1801. Heavy duty frame strengthening cross shaft on T1401 through T1801 maintains ratchet alignment under heavy loads.



Part #	Capacity	Gear Ratio	Handle	Mech. Adv.	Ratchet	Rope	Strap	Hub	Handle
FUL T600 0101	600 lb	3.1:1	6"	34:1	Grabber 1-way	36' x 1/4"	15' x 2"	5/8"	5868
FUL T900 0101	900 lb	3.1:1	7"	39:1	Grabber 1-way	36' x 1/4"	15' x 2"	5/8"	6312
FUL T1100 0101	1,100 lb	4.1:1	7"	43:1	2-Way	30' x 5/16"	20' x 2"	3/4"	6312
FUL T1300 0101	1,300 lb	4.1:1	8"	49:1	2-Way	30' x 5/16"	20' x 2"	3/4"	6302
FUL T1500 0101	1,500 lb	4.1:1	8"	49:1	2-Way	20' x 5/16"	20' x 2"	3/4"	6302
FUL T1500Z 0101*	1,500 lb	4.1:1	8"	49:1	2-Way	20' x 5/16"	20' x 2"	3/4"	6302
FUL T1602 0101	1,600 lb	5.1:1	9"	56:1	2-Way	20' x 7/16"	20' x 2"	7/8"	6822
FUL T1801 0101	1,800 lb	5.1:1	10"	62:1	2-Way	20' x 7/16"	20' x 2"	7/8"	6817

\*Comes complete with a 20' x 2" strap

Note: If you are pulling a load use a trailer winch and if you are lifting a load use a brake winch.

**Two Speed Trailer Winches**

One fast speed for quick pull in, the other slower speed pulls heavy loads easily. Fulton two speed winches allow changing speed, without changing handles. Shift lock holds shaft in the desired gear ratio. Just lift the lock and move shaft to change speed. Free-wheeling without a spinning handle makes for safer operation. Neutral position for quick line payout without spinning the handle. 2-way ratchet pawl also has neutral position. Zinc plated for superior corrosion resistance. Optional hand brake kit, No. 1619 available for all models. Brake is purchased separately and can be installed after winch is mounted.



Part #	Capacity	Gear Ratio	Handle	Mech. Adv.	Rope*	Cable*	Hub	Handle
FUL T2005 0101	2,000 lb	4.1:1 & 9.8:1	10"	87:1	20' x 7/16"	-	1"	6817
FUL T2605B 0101	2,600 lb	5.1:1 & 12.2:1	10"	108:1	24' x 7/16"	-	1"	6817
FUL T3205 0101	3,200 lb	5.1:1 & 12.2:1	10"	79:1	-	185' x 7/32"	3/4"	6312

\*Not included

**Fulton Winch Parts**

- FUL 0133306-S01 Ratchet Kit, T11/13/1500
- FUL 1598S01 Ratchet Repair Kit, T1602/1605/1802/1805
- FUL 0133301-S01 Ratchet Kit, XLT14Z
- FUL 0133304-S01 Ratchet Kit, XLT18Z
- FUL 1514S01 Ratchet Kit, T600, 900, 1000, 1200
- FUL 1597S01 Ratchet Kit, T1401, 1602, 1801
- FUL 1562S00 Ratchet Kit, T2005, 2605,B, 3205
- FUL 5621P-01 Wire Cable Keeper Kit (pkg)
- FUL 6302P-01 8" Handle Assembly

- FUL 6312P-01 Handle, T900/1000A/1100
- FUL 6817P-01 10" Winch Handle (pkg)
- FUL 6822-01 Spare Handle, T1602
- FUL 5868P01 Handle for T600 winch
- FUL 0133303-S01 Pinion Shaft Kit, T1602/1801
- FUL 0133302-S00 Pinion Shaft Kit, XLT14Z
- FUL 0133305-S01 Pinion Shaft Kit, XLT18Z
- FUL 0133307-S01 Pinion Shaft Kit, T11/13/1500
- FUL 4254S01 Pinion Shaft Kit
- FUL 1619-01 Optional Hand brake Kit

**Fulton F2 Trailer Winch**

- Completely enclosed design
- Adjustable 6" - 9" handle
- Dual gear drum
- Handle mounts left or right side
- Strap included

**FUL FW2000-0101** 2000 lb single speed

**FUL FW3200-0101** 3200 lb 2 speed



**Fulton Automatic Brake Winch**

A 2500 lb capacity single speed automatic brake winch. Whether raising or lowering a load, the double disc automatic brake system provides the needed control for load security. Brake design also allows payout of line with no load on the winch. Oil impregnated bushings, 15.8:1 gear ratio and 11" comfort grip handle allow for low handle efforts under load. Heavy-duty reinforced frame maintains gear alignment under load improving life cycle performance. Zinc plating provides superior corrosion resistance. Includes cable keeper for securing cable to winch drum. 11.13" x 7.13" with 11" handle

**FUL K2550 0101** 2500 lb



**Fulton KX Work Deluxe Winch**

Fulton brand K-Series self-activating automatic brake winches hold the load securely when the crank handle is released. No minimum line load is required to activate the brake or pay out cable from the winch. Drum hubs are 10 times the recommended cable size to maximize cable life. Plated gear covers for improved gear train protection and a dual ratchet system.

- Rated pull: 700-1,500 lbs
- Max cable: 1/4"
- Drum storage: 70'
- Gear ratio: 5.1:1

**FUL KX1550 0101**



**Masterlock Portable 12V Trailer Winch**

- Powerful rack and pinion gear design
- Can be temporarily mounted to a ball mount or attached to a flat surface with mounting plate
- Power battery cables, wired remote control, back-up hand crank and hook with safety latch included
- Convenient carrying handle built-into winch housing
- Cable length: 30'
- Max. boat weight: 5,000 lbs
- Power cord: 20'
- Remote cable: 9' 9"
- Weight: 27 lbs
- Line speed: 6'/per minute
- W: 8.3" x H: 7.8" x D: 9.6"

**MAL 2953AT**



**Rule Trailer Winches**

Unique features include 3-stage planetary gears for greater pulling speed, power-in, power-out for consistent load control; corrosion resistant die cast drums and lifetime lubrication. Each winch is shipped with the cable assembly including hook, controls, and all electrical hardware necessary for battery hook-up and mounting hardware. Winches are free spooling.

Model #	Maximum Boat Weight (lbs)		
	20% Grade (11°)	40% Grade (22°)	Line Speed (ft/min)
14 Series	3700	1900	24.0
20 Series	5100	3300	24.0

**\*Note:** A winches rated line pull is based on performance with one wrap of cable on the drum. A winches pulling capacity decreases substantially with each additional wrap on the drum.



Part #	Stall lbs/kg	Cable Guide	Free Spool	Cable Size	Type Control	Weight (lbs)	Volts	Circuit Breakers
<b>RUL T-14-S</b>	1400/635	No	No	5/32" x 25' (4.0 mm x 7.6 m)	On motor, lanyard	19	12	1-40A
<b>RUL T-20-S</b>	2000/907	No	No	3/16" x 25' (4.8 mm x 7.6 m)	On motor, lanyard	19	12	1-40A

**Rule Switch Kits**

An on winch switch with 25' wiring harness assembly for use on trailers or as a replacement.

**RUL W-1028** 14 & 20 Series winches  
**RUL W-124** 33 Series winches

**Rule Remote Station Kit**

Allows a rotary motor switch to be moved to a remote location. Includes 2 - 10' cables and a switch plate.

**RUL W-120**

**Rule Winch Cable**

- 7/32" x 50' (5.5 mm x 15.2 m)

**RUL W-114**

**Rule Remote Electrical Controls**

Convert from motor switch to solenoid control box, control handle with a 10' cord, and battery wiring harness.

**RUL W-121** Control with 15' wiring harness  
**RUL W-123** Control with 25' wiring harness

**Innovative Lighting Waterproof LED Side Marker/Clearance Light**

- Operates on 9-16 Volt DC systems
- 2 LED configuration
- 100,000 hours of service life
- Sonically sealed polycarbonate lens and housing
- Energy draw 50 milliamperes
- Mounted horizontally only
- 2.60" L x 1.90" W x .66" D



**INO 200-4481-7** Each

**Wesbar Waterproof LED Side Marker/Clearance Lights**

Waterproof LED clearance/side marker light designed for easy installation. Snap lock base mount.

- 2-7/8" x 1-1/2" x 1"

**WSB 401580** Amber  
**WSB 401581** Red

**Wesbar Waterproof LED Side Marker/Clearance Lights**

- Mini LED light
- Single wire. self grounding
- 1/4" stud mount
- 2-1/8" x 1-1/8" x 1-1/16"

**WSB 401565** Amber  
**WSB 401566** Red

**Notes**

### Wesbar Waterproof Side Marker/Clearance Lights

- Constructed of tough polycarbonate
- **Bulb is contained in a waterproof compartment**
- Comes with a pre-installed 15" lead wire
- Used as a **combination side marker and clearance light**, when properly mounted (Note: Reflex reflector is not included)
- Stud: 2-1/8" x 1-1/8" x 1-1/16"
- Ear: 3-5/16" x 1-5/16" x 1"

**WSB 203233** Amber stud mount  
**WSB 203234** Red stud mount

**WSB 203285** Amber ear mount  
**WSB 203286** Red ear mount



### Wesbar Waterproof Side Marker/Clearance Lamps

Sonically sealed, break resistant polycarbonate lens and housing insure a waterproof module. Meets requirements for both side marker and clearance lamp when mounted on a 45° angle.

- 2-1/2" x 1-1/4"

**WSB 203292** Amber w/ black base  
**WSB 203293** Red w/ black base

Parts:

**WSB 203395** Amber light module  
**WSB 203396** Red light module



### Wesbar Waterproof Side Marker/Clearance Light - Reflex Lens

Combines an ultrasonic welded waterproof seal and integral reflex reflector into a unique light. Mounts either horizontally or vertically. Conforms to DOT standards. Factory prewired with a 15" pigtail. Amber. Blister packed.

- 4-3/4" L x 1-7/16" W x 1-1/4" H

**WSB 203260**



### Wesbar Side Marker/Clearance Lights

Meets applicable DOT-108 lighting standards for clearance / marker lamps when properly mounted ("PC" Rated). Features Wesbar's "Quick Connect/Disconnect Wiring" feature. **Bulbs and lenses are easily replaceable.**

- 2-1/4" L x 2-1/4" H x 1-1/4" D

**WSB 203235** Amber  
**WSB 203236** Red

Parts:

**WSB 003340** Replacement amber lens  
**SPE 57** Spare bulb



### Wesbar Side Marker/Clearance Lights - Reflex Lens

With the built-in reflex reflectors these side marker or clearance lights become even more valuable. Features include Wesbar's patented Quick Connect/Disconnect wiring method, and popular "stud mount" style. Lenses are easily removed for quick replacement. Black housing, amber lens. Display packaged.

- 3-1/8" x 2-3/8"

**WSB 203111** Amber  
**WSB 203113** Red  
**WSB 003338** Replacement amber lens



### Wesbar Side Marker/Clearance Light - Reflex Lens

Features hidden mounting hardware with "Snap Fit" lens and built-in reflector. Bulbs and lenses are easily replaceable. Features Wesbar's "Quick Connect/Disconnect Wiring".

- 3-3/4" L x 2-1/4" H x 15/16" D

**WSB 203263** Amber

Parts:

**WSB 003378** Replacement amber lens  
**SPE 194** Spare bulb



### Wesbar Class A Reflex Reflectors

These reflectors meet or exceed all applicable DOT and SAE "Class A" specifications. Reflectors have pressure sensitive backs which bond to virtually any smooth, clean surface.

- 3-1/4" L x 1-1/2" H

**WSB 003357** Amber  
**WSB 003358** Red



**Wesbar LED Light Bar**



Same as the WSB 203315 waterproof identification light above but each of the lighting modules uses three LED's for illumination.

- WSB 401567**      Packaged
- WSB 4799004**    Bulk

**Wesbar Waterproof Identification Light Bar**



For boat trailers 80" or more in overall width. Three fully waterproof lamps on 6" centres to this stainless steel bar. Watertight lights are molded in durable polycarbonate. The unit comes pre-wired with a 60" lead.

- 14-1/2" L x 1-3/8" H x 1-1/2" D

**WSB 203315**      Light bar with red modules

**Wesbar Waterproof Identification Light Bar**

The best light bar available for boat trailers 80" or more in overall width. Three fully waterproof lamps on 6" centres to this stainless steel bar.



Watertight lights are molded in durable polycarbonate for best damage resistance.

- 14-1/2" L x 1-3/8" H x 1-1/2" D

**WSB 203309**    Light bar with replaceable modules

Parts:

**WSB 203396**    Red replacement module

**Optronics Waterproof Aero Pro Over 80" Combination Tail Lights**

Waterproof universal mount stop/turn/tail lights for over 80" applications. Sleek, contemporary housing design.



ST-36 is 7-function and the ST-37 includes license illuminator as well. Features screw-on, replaceable lens and easy to change replaceable bulb. Shock proof socket guarantees long bulb life. All-weather molded plastic housing and durable lens protect against corrosion.

- 7-7/8" L x 2-7/8" W

**OPT STL36RS**      Right hand - 7-function

**OPT STL37RS**      Left hand - 8-function

**Wesbar Waterproof Sealed Recessed Tail Light**



- Red Stop/Tail/Turn light
- Sonically sealed polycarbonate lens and housing
- Shock mounted dual filament bulb
- Oval grommet & 3-way plug
- Meets DOT standards for stop, turn & tail lamps
- L: 6-1/2" x W: 2-1/4" x D: 2-3/8"

**WSB 403080**

Parts:

**WSB 403085**      Replacement sealed light module

**Wesbar Waterproof LED 6" Oval Grommet Mount Tail Lamp**

- Red Stop/Tail/Turn light
- Horizontal mount
- Waterproof grommet mount
- LED illumination
- 6-1/2" L x 2-5/16" H x 7/8" D



**WSB 401584**      Assembly

**WSB 106873**      Mounting bracket

**WSB 416088**      Spare Grommet

**Wesbar Waterproof LED 'Over 80' Wrap-Around Tail Lights**

- Waterproof surface mount tail lights
- Wrap-around design eliminates the need for rear side marker/reflector
- Plug-in 12" harness with 2-way flat connector and ring terminal ground wire
- Stainless steel mounting hardware included
- Meet FMVSS/CMVSS 108 requirements
- 7.53" x 3.48" x 3.13"



**WSB 271594**      7-function, right/curbside

**WSB 271595**      8-function, left/roadside

**Wesbar Submersible 'Under 80' Tail Lights**

Submersible tail lights are designed to protect the bulbs and contacts when the trailer is under water during launching and loading.



- Gasketed tail light and side marker lenses are replaceable
- Closed bottom design prevents road grit from entering the lamp
- 12" pre-installed wire leads
- Two 1/4" mounting studs on 2" centres
- Black housing
- Display packaged
- 5" x 5-1/2" x 2-1/2"

**WSB 2523023**      7-function, left/roadside

**WSB 2523073**      6-function right/curbside

Parts:

**WSB 403335**      Replacement square tail lens

**WSB 003337**      Replacement side marker lens

**WSB 003349**      Replacement gaskets set

### Wesbar Waterproof LED 3" x 8" Tail Lights

Low profile style has a durable acrylic lens sonically sealed to base (assures watertight seal). Complies with all DOT requirements for over 80" trailers when mounted properly. LED lights are rated at 100,000 hours. Light functions include stop, turn and tail lights. Left side light includes license plate illuminator. Plated steel hardware included.

- 8" x 2-7/8" x 2-3/4"

**WSB 407530** 7-function, right/curbside

**WSB 407535** 8-function, left/roadside



### Wesbar Waterproof LED 3" x 8" Tail Light Kit

Kit contains:

- 1 right 7-function & left 8-function tail light
- 1 Plastic license plate bracket
- 25' 4-flat Wishbone trailer harness
- 4' wire harness
- Hardware & install instructions.
- Display packaged

**WSB 407540**



### Wesbar Waterproof LED 4" x 6" Tail Lights

Low profile style has a durable acrylic lens sonically sealed to base (assures watertight seal). Complies with all DOT requirements for over 80" trailers when mounted properly. LED lights are rated at 100,000 hours. Light functions include stop, turn and tail lights. Left side light includes license plate illuminator. Plated steel hardware included.

- 6" x 3-1/2" x 2-1/4"

**WSB 407550** 7-function, right/curbside

**WSB 407555** 8-function, left/roadside



### Wesbar Waterproof LED 4" x 6" Tail Light Kit

Kit contains:

- 1 right 7-function & left 8-function tail light
- 1 Plastic license plate bracket
- 25' 4-flat wishbone trailer harness
- 4' wire harness
- Hardware & install instructions
- Display packaged

**WSB 407560**



### Wesbar Waterproof Low Profile Tail Lights

These tail lights feature a sealed lamp capsule that protects the bulb and electrical contacts from damage. Life expectancy of the bulbs in the replaceable capsule is 2,900 hours. These units serve seven basic functions - tail light, stop light, turn signal, side and rear reflex reflector, red side marker light and red rear clearance light. The left hand light has a built-in license plate illuminator. These lights easily can be flush or recess mounted and come with 15" pigtails. Black housing. Display packaged.

- 8" L x 2-7/8" H x 2-3/4" D

**WSB 403026** 8-function left/curbside

**WSB 403076** 7-function right roadside

Parts:

**WSB 403348** Replacement capsule

**WSB 403336** Replacement lens set



### Wesbar Waterproof Low Profile Tail Light Kits

Kit contains:

- 2 waterproof over 80" tail lamps
- 2 sealed amber side marker lamps
- License plate bracket
- 25' wishbone wiring harness
- 4' trunk connector
- Hardware & install instructions

**WSB 007509**



## FYI

### Multi-Function Lights

6-function: stop, turn, tail, rear reflex, side marker, and side reflex

7-function: stop, turn, tail, rear clearance, rear reflex, side marker, and side reflex

8-function includes all of above plus a license plate illuminator

**Wesbar Waterproof Tail Lights**

Sleek automotive styling, with multi-function capability in a ultrasonically sealed capsule to provide protection against corrosion and bulb failure. The left hand light has a built-in plate light. Comes with 2" centred studs, 15" pigtail and mounting hardware.

- 8" L x 3-3/8" H x 3-3/8" D



- WSB 403028** 8-function left/curbside
  - WSB 403078** 7-function right roadside
- Parts:
- WSB 003372** Replacement lens - LH
  - WSB 003373** Replacement lens - RH
  - WSB 403348** Replacement capsule

**Wesbar Waterproof Tail Light Kits**

- 2 waterproof over 80" tail lamps
- 2 sealed amber side marker lamps
- License plate bracket
- 25' wishbone wiring harness
- 4' trunk connector
- Hardware & installation instructions



**WSB 007516**

**Wesbar Deluxe Submersible 'Over 80' Tail Lights**

Durable acrylic lens sonically sealed to base (assures watertight seal). Submersible using the reliable "Bell Jar" principle. Mounts flush with standard 2" mounting bolt pattern. Complies with all DOT requirements for over 80" trailers when mounted properly. Easily replaceable bulbs. Plated steel hardware included.

- 6" W x 3-1/2" H x 2-1/4" D



- WSB 403025** 8-function left/curbside
- WSB 403075** 7-function right roadside

**Wesbar Deluxe Submersible 'Over 80' Tail Light Kit**

Kit contains:

- 1 right & left-hand tail light
- 2 Standard amber side lights
- 1 Plastic license plate bracket
- 20' 4-flat Wishbone trailer harness
- 4' 4-way trunk connector with ground
- Quick connect/disconnects & installation instructions


Display packaged.



**WSB 407515**

**Wesbar Deluxe Tail Lights**

An extra "hot" connection is also included in each light to provide for quick and easy wiring of additional or auxiliary lights. Two 1/4" diameter mounting studs on 2" centres.



- WSB 2823283** 7-function, left/roadside
  - WSB 2823284** 6-Function right-hand tail light
- Parts:
- WSB 403335** Replacement square tail lens
  - WSB 003337** Replacement side marker lens

**Wesbar Deluxe Tail Light Kit**

Kit contains:

- 1 right & left-hand tail light
- 1 Plastic license plate bracket
- 20' 4-flat Wishbone trailer harness
- 4' 4-way trunk connector with ground
- Quick connect/disconnects & installation instructions

Display packaged.



**WSB 407500**

**Wesbar Trailer Light Adapters**



Wesbar harnesses conform to all applicable SAE, NMMA and TMA standards to provide years of dependable service.

- WSB 707250** 7-Round (blade) to 5-flat female 18"
- WSB 707282** 7-Round (blade) to 4-flat female
- WSB 767940** 7- way blade to 5 - way flat
- WSB 787195** 4' Coil 7-way trailer to 5-way flat car end
- WSB 787196** 8' Coil 7-way trailer to 5-way flat car end

**Marine Works 'Y' Harness**

Flat 4 pole 'Y' connector. Consists of: 4' vehicle side connector, 25' trailer side connector, splice connectors, and wire clips. Trailer side wires are split to allow routing of wires down both sides for easy hook up. Safe colour coded wires.



**MWK 43744**

**Marine Works 4-Way Wiring Harness Kit**

Shrouded, polarized, flat 4 pole 'Y' connector. Consists of: 4' vehicle side connector, 25' trailer side connector, splice connectors, and wire clips. Trailer side wires are split to allow routing of wires down both sides for easy hook up. Safe colour coded wires.



**MWK 43754**

**Marine Works Boat Plug Tester**

Handy tester for all 4 pole flat boat plug connectors. Plugs into tow vehicle and LEDs illuminate to show if connections are correct and working. Tests tail, stop/turn and ground.



**MWK 42884**

**Wesbar Plug Testers**



- WSB 767941** 4-flat tester w/ LED lights
- WSB 767942** 5-flat tester w/ LED lights
- WSB 51-767811** 6 way-round tester w/ LED lights
- WSB 767943** 7-way blade tester/emulator

**Wesbar Wiring Accessories**

Designed for the Do-It-Yourself market, these trailer wiring kits are easy to install. Comes with complete instructions.

- Display packaged



- WSB 707103** Kit complete
- 2' 4 Way to 4 way extension harness
- WSB 707254**

48" Wishbone trailer connector - 5 Flat. Includes a 5th circuit for back up lights, surge brake lockouts or other low amp. 12 Volt . options.



- WSB 707283**
- Trunk to trailer connector kit, 4-way, 66"
- WSB 707270**

- 4-way, 6' trunk connector
- WSB 707272**



- 5-way, 72" flat trunk connector
- WSB 707273**

- 4' trunk connector
- WSB 707275**



- 4-way, 18" trailer connector-wunside
- WSB 707285**

- 4' trunk connector, 18" ground
- WSB 702305**



- 18" trailer connector-wunside
- WSB 702405**



- 2' extension harness
- WSB 707255**

- 18" trailer connector-wishbone
- WSB 707286**

**Marine Works Electronic Trailer Light Converter**

Allows cars with separate stop and signal lamps (most imports and many late model domestics) to tow trailers with the "normal" combined stop/signal lamps. Eliminates the need for additional lamps on the trailer or time consuming rewiring of trailer. Comes with bare wires for splicing into existing harness.



**MWK 43504**

**Marine Works Trailer Connector Adapter**

• 6 way to 4 connector adapter  
Use to tow a trailer with a 4-pole flat connector with a tow vehicle equipped with a 6-pole round trailer connector. No cutting splicing or tracing wires. Plug in connection makes connecting the two different connectors a snap.



**MWK 42904**

**Marine Works Trailer Connector Converter**

• 7 way to 4 connector adapter  
Use to tow a trailer with a 4-pole flat connector with a tow vehicle equipped with a 7-pole RV style blade trailer connector. No cutting, splicing, or tracing wires. Plug in connection makes connecting the two different connectors a snap. Adapts many late model factory "prewired" vehicles (including Jeep, Ford Truck and Winnebagos) to the more commonly used 4-pole flat connector.



**MWK 42914**

**Marine Works Trailer Connector Adapter**



7-Pole round (tow vehicle) to 5-pole (trailer).

**MWK 51300**

**Marine Works Heavy Duty Connector**

Complete heavy duty die cast, chrome plated 4-pole connector kit. Contains one 4 pole connector with hardware, mounting bracket, wire and splice connectors.



**MWK 43764**

**Marine Works T-Connect Trailer Connectors**

Unique one piece plug in trailer connector kit makes electrical hook up on light trucks (pickups, sport utilities and vans) a snap. No stripping, splicing or tracing wires.



**MWK 44514** 1993-94 Ranger

T-Connect adapter kit.

**MWK 44984** 7-pole



**Sea-Dog 4-Way Trailer Plug Cover**

Four-way trailer plug cover protects plug on trailer and vehicle from corrosion and moisture when plugs are not in use. Includes four-way male and four-way female plug covers. Attaches easily to cable or wire.



**SED 426879-1**

**Pico Trailer Hook-Ups**



Pre-wired molded trailer connectors, male & female with 12" loop wire. Cut and splice into wiring assembly. All sets are polarized & colour coded.

- PIC 1871BP** 2 Pin 16 ga. connector
- PIC 1878BP** 2 Pin 10 ga. connector
- PIC 1873BP** 4 Pin 16 ga. connector

**Marine Works Male 4-Pole Connector**

Male 4 pole flat connector with 12" colour coded wires. Bubble packed on cards.

**MWK 44054**



**Marine Works Female 4-Pole Connector**

Female 4 pole flat connect with 48" colour coded wires. Bubble packed on cards.

**MWK 44094**



**Marine Works Connectors**

12" long wire leads on male and female sides. Molded waterproof bodies. Colour coded wires. Polarized. Precision terminals. Bubble packed on cards.

- MWK 43634** 2 pole
- MWK 43654** 4 pole



**Fulton Bunk Carpeting**

Protection from scratches & abrasions using this black weather resistant marine carpeting.

- FUL CR8008** 8" x 12'
- FUL CR8012** 12" x 12'



**Yates End Cap**

- Non-marking black rubber
- O.D.: 3-1/2", W: 1-15/16"
- For shaft size: 1/2"

**YRP 134-5**



**Yates Boat Trailer Y Stops**

- Non-marking black rubber

Part #	Base	Span	For Shaft Size
<b>YRP 4Y22-3</b>	2" x 2"	4"	3/8"
<b>YRP 6Y33-4</b>	3" x 3"	6"	1/2"
<b>YRP 7Y44-4</b>	4" x 4"	7"	1/2"



**Yates Boat Trailer Bow Rollers**

- Non-marking black rubber

Part #	O.D.	Width	Shaft Size
<b>YRP 3143-4</b>	3"	3-1/8"	1/2"
<b>YRP 4174-4</b>	3-1/2"	3-3/4"	1/2"



**Yates Boat Trailer Ribbed Roller**

- Non-marking black rubber
- OD: 5", W: 3"
- Insert: nylon, Shaft: 3/4"

**YRP 530R-6PS**



**Yates Boat Trailer Spool Rollers**

- Non-marking black rubber
- OD Flange: 3", OD Centre: 2"



Part #	Length	Insert	For Shaft Size
<b>YRP 4163-4P</b>	4"	Plastic	1/2"
<b>YRP 5203-4P</b>	5-1/4"	Plastic	1/2"
<b>YRP 5203-5P</b>	5-1/4"	Plastic	5/8"
<b>YRP 8302-4P</b>	7-5/8"	Plastic	1/2"

**Yates Boat Trailer Keel Rollers**

- Non-marking black rubber
- For shaft size: 5/8"



Part #	Length	O.D. Flange	O.D. Centre	For Shaft Insert
<b>YRP 5213-5</b>	4-7/8"	3"	1-1/2"	Steel Sleeve
<b>YRP 5213-5P</b>	4-7/8"	3"	1-1/2"	Plastic Sleeve
<b>YRP 8000</b>	7-3/4"	3-3/8"	2-3/8"	Nylon End Cap
<b>YRP 12000</b>	11-3/4"	3-3/8"	2-3/8"	Nylon End Cap

**YRP 155EC**

Replacement bushings for the 8000 and 12000 series rollers.

**Yates Side Guide Roller**

- Length: 12"
- O.D. Flange: 2-1/2"
- For shaft size: 5/8"

**YRP 12243-5**



**Yates Boat Trailer Rocker Roller**

- Non-marking black rubber
- OD: 4-1/4", W: 4-1/4"
- Insert: Zinc chromated washer
- Shaft size: 3/4"

**YRP 440R**



**Tie Down Engineering Wobble Roller**

- 5" smooth black

**TIE 86428** Black



**Tie Down Engineering Keel Rollers**

These polyvinyl chloride with UV inhibitors rollers have non marking assurance built in and will not put any marks on your boat. These rollers will outlast rubber rollers, are shock resistant and extremely cut resistant.

Description	Shaft		Amber #	Black #
3" - Roller Bow	1/2"	1	<b>TIE 86289</b>	<b>TIE 86402</b>
3" - End Bell	1/2"	2	<b>TIE 86290</b>	-
3" - Roller Assembly w/ End Bells	1/2"	3	<b>TIE 86143</b>	-
4" - Roller, Bow	1/2"	4	<b>TIE 86287</b>	<b>TIE 86400</b>
4" - End Bell	1/2"	2	<b>TIE 86288</b>	-
4" - Roller Assembly w/ End Bells	1/2"	3	<b>TIE 86142</b>	-
4" - Keel Roller - Spool Type	5/8"	5	<b>TIE 86284</b>	<b>TIE 86406</b>
5" - Keel Roller (center guided)	5/8"	6	<b>TIE 86158</b>	<b>TIE 86407</b>
5" - Keel Roller - Spool type	5/8"	7	<b>TIE 86283</b>	<b>TIE 86408</b>
8" - Keel Roller	5/8"	8	<b>TIE 86159</b>	<b>TIE 86409</b>
10" - Keel Roller	5/8"	8	<b>TIE 86169</b>	<b>TIE 86410</b>
12" - Keel Roller	5/8"	8	<b>TIE 86199</b>	-
3.5" - End Caps	N/A	9	<b>TIE 86198</b>	-
15" x 3.5" - Keel Pad	N/A	10	<b>TIE 86291</b>	-
2" - "V" Bow Stop	1/2"	11	-	<b>TIE 86420</b>
3" - "V" Bow Stop	1/2"	12	<b>TIE 86285</b>	<b>TIE 86413</b>
4" - "V" Bow Stop	1/2"	13	-	<b>TIE 86421</b>



**Tie Down Engineering Wobble Roller Kit**

K-kits include (4) 5" ribbed amber rollers, 7/8" & 1.15" bushings, hog ring & washers.

**TIE 86144** Ribbed, amber



**Tie Down Engineering Roller Shaft & Pal Nuts**

- TIE 86025** Roller shaft 1/2" x 5-1/4" with 2 pal nuts
- TIE 86026** Roller shaft 1/2" x 6-1/4" with 2 pal nuts
- TIE 86027** Roller shaft 5/8" x 5-1/4" with 2 pal nuts
- TIE 86028** Roller shaft 5/8" x 6-1/4" with 2 pal nuts
- TIE 86029** Roller shaft 5/8" x 9-1/4" with 2 pal nuts
- TIE 86030** Roller shaft 5/8" x 11-1/4" with 2 pal nuts
- TIE 86031** Roller shaft 5/8" x 13-1/4" with 2 pal nuts
- TIE 86305** 1/2" pal nuts 4 per card
- TIE 86310** 5/8" pal nuts 4 per card
- TIE 86300** 1/2" pal nuts 50 per box
- TIE 86301** 5/8" pal nuts 50 per box



**Tie Down Engineering Bunk, Swivel & Keel Brackets**

Bunk bracket, made from heavy duty 11gauge hot dip galvanized steel. Slotted for vertical adjustment to standard or deep V hulls.

- TIE 81225** 9-1/2" long with 6" slot
- TIE 81230** 12-5/8" long with 9-1/8" slot



Split brackets, accommodate any size roller length. Slot allows vertical adjustment for stabilizing boat on trailer. Slots accept 7/16" or 1/2" bolts. Use 1/2" or 5/8" roller shafts. Sold in pairs.

**TIE 81235**



Use with adjustable bolster brackets for proper angle of bunk or bolster boards. Swivel bracket c/w 1/2" x 1" bolts with nylock nuts per pr.

**TIE 86160**



Adjustable offset brackets mount on tongue for keel support. Assembled version comes complete with 4" rubber roller for 2" wide tongue.

**TIE 86121**



### Tie Down Engineering Bolster Brackets

Bolster brackets are designed to support bolster or bunk boards. Slotted for vertical adjustment and feature non-slip dimples to avoid movement and increase load capacity.



<b>TIE 81210</b>	8" with 2-3/4" slot w/ swivel bracket 2 per pkg.
<b>TIE 81215</b>	10" with 3-3/4" slot w/ swivel bracket 2 per pkg
<b>TIE 81220</b>	12" with 4-3/4" slot w/ swivel bracket 2 per pkg
<b>TIE 81250</b>	12" with 4-3/4" slot 2 per pkg
<b>TIE 81195</b>	8" with 2-3/4" slot 2 per pkg
<b>TIE 81200</b>	10" with 3-3/4" slot 2 per pkg

### Tie Down Engineering Lug Nuts & Bolts

<b>TIE 81172</b>	1/2" Lug nuts, 5/pkg
<b>TIE 81170</b>	1/2" Lug bolts, 5/pkg



### Tie Down Engineering Pyramid Washers

Zinc plated, star shaped washers are ideal for use with U-bolts in heavy duty applications.



<b>TIE 86273</b>	3/8"
------------------	------

### Tie Down Engineering Hex Head Bolts

Use for mounting brackets, couplers and winch stands. Grade 5, zinc plated steel. Kit contains four bolts, washers and nylock nuts.



<b>TIE 86253</b>	3/8" x 3"
<b>TIE 86254</b>	3/8" x 4"
<b>TIE 86255</b>	3/8" x 1"
<b>TIE 86256</b>	7/16" x 1"
<b>TIE 86257</b>	1/2" x 3-1/2"

### Tie Down Engineering Trailer Parts



Precision tapered roller bearings

<b>TIE 81304</b>	1-1/16" bulk bearings - 2/pkg
<b>TIE 81305</b>	1-1/16" bulk cups - 2/pkg
<b>TIE 81110</b>	1" bearings
<b>TIE 81111</b>	1" bearings w/ dust cap
<b>TIE 81115</b>	1-1/16" bearings
<b>TIE 81116</b>	1-1/16" bearings w/ dust cap
<b>TIE 81125</b>	1-1/4" bearings
<b>TIE 81126</b>	1-1/4" bearings w/ dust cap
<b>TIE 81140</b>	1-3/8" x 1-1/16" tapered bearings
<b>TIE 81141</b>	1-3/8" x 1-1/16" tapered bearings w/ dust cap
<b>TIE 81167</b>	1.98" dust caps, pair

### Fulton Bearing Life Wheel Bearing Protectors

Provide permanent protection against damage from water and dirt entering the wheel bearings. Prevents corrosion resulting from water entering the hub when the trailer wheels are submerged. Made of non-corrosive aluminum.



<b>FUL BPC198-0604</b>	1.98" (covers included)
<b>FUL BPC178-0604</b>	1.78" (covers included)
<b>FUL BP232S-0604</b>	2.328" (w/ o covers)
<b>FUL BP244S-0604</b>	2.441" (w/ o covers)
<b>FUL BB178-10112</b>	1.78" (covers only)
<b>FUL BB198-00112</b>	1.98" (covers only)
<b>FUL BB244-10112</b>	2.328" / 2.441" (covers only)

### Tiedown Engineering Brake Actuators



An all aluminum master cylinder incorporates the shock absorber into the cylinder assembly providing the operator with a warning signal in low fluid conditions. This oversized master cylinder provides enough pressure and fluid volumes to run both tandem and tri-axle configurations.

Other features include:

- Cast ball clamp
- Extended latch lever
- Exterior emergency safety cable lock and release
- Vinyl coated coiled emergency stop cable
- Safety lock pin with back up position

\* Available for disc or drum brake applications.

\* For 2" trailer ball only

<b>TIE 86165</b>	Disc brake unit
<b>TIE 86167</b>	Drum brake unit

**Tie Down Engineering Trailer Disc Brakes**

Cast aluminum callipers with E-Coat finish. Bronze pistons & stainless steel rotor with floating pads and metal backing plate.

- Vented calliper housing
- Grade 413 aluminum
- Factory pre-installed stainless steel pins



Part #	Description	Rotor Diameter	Hub Capacity	Hub Bearing size	Hub Bolt Pattern
<b>TIE 81101</b>	10" Assembly, galvanized	9.2"	1750#	1-1/16" & 1-3/8"	5 @ 4.5"
<b>TIE 81104</b>	12" Assembly, E-coated	10-3/8"	3000#	1-1/4" & 1-3/4"	6 @ 5.5"

Parts:

- TIE 46243** Calliper assembly w/ pads
- TIE 81100** S/S floating brake pad kit (4/pkg)
- TIE 81103** Reverse backing solenoid kit
- TIE 82084** Eliminator vented rotor pads (4/pkg)



**Trailer Drum Brakes**

A highly corrosion resistant drum brake. The GalvX system is composed of inorganic polymers which bond metallic zinc flakes to the metal surface.

- Aluminum wheel cylinder
- Stainless steel springs
- Brake pads are bonded and riveted with bronze rivets to backing plate
- Superior saltwater performance over standard drum brakes

- TIE 81097** 10" Galv-x drum brake kit
- TIE 81004** 10" Brake drum hub (painted)



Tie-Down Engineering Disc Brake Features	
<b>Floating Pads with metal backing plate:</b>	Allows for better alignment of pads to rotor.
<b>Lock-tite on all bolts and screws:</b>	Keeps all bolts and screws in place but will release for pad and caliper replacement.
<b>E-Coated Grade 413 aluminum caliper housing:</b>	Grade 413 aluminum contains more magnesium and less copper providing a harder and more corrosion resistant compound. E-Coated for added corrosion protection.
<b>Semi-metallic pads:</b>	Improved wear over organic pads.
<b>Pressure equalizing port:</b>	Port connects the two piston chambers in order to maintain equal pressure and allow brakes to "bleed" properly for improved operation.
<b>Sliding caliper pins w/ oil impregnated bronze bushing:</b>	Allows caliper to float more freely and ensures proper alignment during installation.
<b>Four point mounting bracket:</b>	Resists bending in the event the trailer is backed up without reverse solenoid engaged. Mounting surfaces are machined to insure proper alignment of the caliper housing to the rotor. Sliding caliper pins are installed on the mounting bracket at our factory to insure proper pin alignment.
<b>Vented caliper housing:</b>	Improves heat dissipation and decreases pad wear.
<b>One piece brass bleeder valves:</b>	Resists corrosion and allows for easier bleeding of the brake system.
<b>Rubber booting piston covers:</b>	Eliminates the possibility of foreign contamination of the piston housing, ensuring trouble free performance in harsh salt water conditions.
<b>Square O-rings with slant edge:</b>	Helps retract pistons away from the rotor when fluid pressure is released. Provides better protection from contamination of brake fluid.

## Tie Down Engineering Trailer Parts

### Super Lube Hub Kits

Bearing and hub cavity 100% pre-greased. Greased seal and bearings are pre-assembled. Kit includes bearings, seal, super lube dust cap, cotter key and lug nuts or lug bolts.

Part #	Bearing Size	Description
<b>TIE 81015</b>	2 ea 1" w/ lug nuts	4 Stud Super Lube hub kit (1250#)
<b>TIE 81040</b>	2 ea 1-1/16" w/ lug nuts	5 Stud Super Lube hub kit (1350#)
<b>TIE 81045</b>	1 ea 1-1/16" & 1-3/8" w/ lug nuts	5 Stud Super Lube UHI hub kit (1750#)

Parts:

**TIE 81174** Rubber grommet cap cover 2/pkg



### Hub Kits

Kit includes bearings, seal, dust cap, cotter key and lug nuts or lug bolts. Factory pre-greased.

Part #	Bearing	Description
<b>TIE 81050</b>	2 ea 1" w/ bolts	4 hole/bolt hub kit (1250#)
<b>TIE 81060</b>	2 ea 1" w/ lug nuts	4 Stud hub kit (1250#)
<b>TIE 81065</b>	2 ea 1-1/16" w/ lug nuts	4 Stud hub kit (1350#)
<b>TIE 81080</b>	2 ea 1" w/ lug nuts	5 Stud hub kit (1250#)
<b>TIE 81085</b>	2 ea 1-1/16" w/ lug nuts	5 Stud hub kit (1350#)
<b>TIE 81090</b>	1 ea 1-1/16" & 1-3/8" w/ lug nuts	5 Stud UHI hub kit



### Tie Down Engineering Flexible Hydraulic Brake Line Kits

Designed to be used on trailers using either surge brake actuators or power brake actuators (vacuum/hydraulic, air/hydraulic, electric/hydraulic). Brake lines provided are DOT/flexible hoses approved for use on all trailer brakes including disc brakes with floating callipers. All fittings are brass for the ultimate in corrosion resistance. This brake line kit is designed to be used to replace existing brake lines or installed on a trailer that has not had brakes before.

#### Kit includes:

- 2- 18" DOT flex hose
- 1- 76" DOT flex hose
- 1 - 240" PSI hose
- 5-cable ties
- 2-union "T" connectors
- 2 'T' clamps
- 8-self taping screws & 4 cable clamps



**TIE 80326** Single axle kit

**TIE 80328** Tandem axle kit

### Tie-Down Engineering Flexible Brake Line Kit

No need to go to the auto parts store again. Two 1/8" ID x 24" flexible 3000 psi. brake lines are ideal for disc brake installation requirements. Connects from brake calliper to female end of brake line or can be connected to existing steel lines. Flexible line connection required on G4 disc brakes.



**TIE 81099**

### Tie-Down Engineering Brake Flush Kit

Easy to install and easy to use. Adapts to all trailers.

**TIE 81107**



### Tie Down Engineering Hitch Cables & Safety Chains



59531



59548



81255

Replace your noisy chains with self-coiling hitch cables. Available plain or vinyl coated. Both use durable galvanized aircraft cable construction. Hitch cables exceed SAE J684 standards for trailer coupling and automotive type hitches. NMMA certified.

**TIE 59533** Black vinyl 36" long rated for Class 1 2000# trailer

**TIE 59535** Galvanized 36" long rated for Class 2 3500# trailer

**TIE 59537** Black vinyl 36" long rated for Class 2 3500# trailer

**TIE 59541** Black vinyl 36" long rated for Class 3 5000# trailer

**TIE 81202** 3/16" x 31" zinc plated rated for Class 2 trailer

**TIE 81203** 1/4" x 31" zinc plated rated for Class 3 trailer

**TIE 81255** "S" Hook safety chain keepers 2 per card

**Tie Down Engineering Winch Cables**

Galvanized steel 7 x 19

- TIE 59385** 3/16" x 25' 4200#
- TIE 59390** 3/16" x 50' 4200#
- TIE 59395** 7/32" x 25' 5600#



**Tie Down Engineering Hook**

Zinc plated, forged latch, 7000 lb replacement hook.

- TIE 50640** XBC55



**Tie Down Engineering U-Bolt Kits**

Use for mounting brackets to trailer frame. Kits include flat washers and nuts.

- TIE 86205** 1/2" x 3-1/8" x 3" Square
- TIE 86206** 1/2" x 3-1/8" x 4" Square
- TIE 86220** 7/16" x 1-9/16" x 3-9/16" Square
- TIE 86221** 1/2" x 1-9/16" x 4-1/16" Square
- TIE 86222** 1/2" x 3-1/16" x 3-13/16" Square
- TIE 86223** 1/2" x 2-1/16" x 4-13/16" Square
- TIE 86224** 3/8" x 1-3/4" x 4-13/16" Round
- TIE 86225** 1/2" x 2-3/8" x 5-3/8" Round



**Wesbar License Plate Bracket**

These cost effective brackets are easily mounted to Wesbar trailer lights in minutes. 1/4" mounting holes on 2" centres.

- WSB 003211** Black
- WSB 003213** Zinc plated steel



**Fulton Handi-Grip Coupler Handle**

This bolt-on handle provides easy, mess-free trailer positioning. Fits all 1-7/8" and 2" couplers.

- FUL CH-0701**



**TH Marine Magna Chock**

Magna chock utilizes a powerful magnet that attaches to your trailer for storage. Made of tough natural rubber and is UV resistant.

- THM MWC-1-DP**



**Megaware Adjustable Trailer Step**



Multi-angle extendable step system for boat trailers.

- 5 preset angles of 22, 45, 67 and 90 degrees
- Extend, retract from approximately 16" to 22"
- Quick lock secure pin
- High tensile extruded 6061 aluminum construction
- Anti-skid step surface
- Step platform measures 14" with 3" tube
- Stainless steel hardware
- 300 lb capacity

- MKG FLEXSTEP**

**Fulton EZ-Move Handle**

- Superior trailer control when moving
- Install with no special tools or drilling
- Zinc plated

- FUL EM-0101**



**Fulton Economy Spare Tire Carrier**

An economical and easy way to lock a spare tire to the trailer tongue to keep it neatly out of the way and to prevent theft. Heavy duty 1/2" diameter zinc plated construction. Fits 8", 9", 12", 13", 14" and 15" wheels with 4 or 5 lug rims.

- FUL ETC0101**



**Fulton Heavy Duty Spare Tire Carriers**

- Heavy duty bolt-on
- 12" - 14" spares with 4 & 5 lugs

- FUL 581902** Heavy duty

- Super heavy duty offset bolt-on
- 15" - 20" spares with 5, 6 & 8

- FUL 581903** Super heavy duty



### Fulton HD Spare Tire Carrier

Fits trailer wheels up to 16-1/2". Provides 4-3/4" lift and over 7" of offset to mount tire up and out of the way. Exclusive Galva-Tech™ finish exceeds industry standard for corrosion protection providing long lasting value. Easy bolt-on installation, no cutting or drilling required.

Fits trailer tongue up to 3" wide by 5" high. All mounting hardware and instructions included

**FUL HDSTC0101**



### Fulton Spare Tire Carrier

Welded and reinforced steel plate construction. Hot dip galvanized for superior corrosion resistance. 4-5/8" side offset allows for mounting away from trailer while 5" high offset raises tire to provide adequate ground clearance. Adjustable bolt circle to fit both 4 lug and 5 lug wheels. Fits all trailer tongues up to 3" wide by 4" high. Complete with zinc plated mounting hardware.

**FUL STC1000101**



### Tie Down Engineering Side Mount Tire Carrier

- Adjustable bolt circle fits both 4 lug and 5 lug wheels
- Offset height raises tire and provides additional ground clearance
- Security holes provide for optional cable and lock (not included)
- Hot dip galvanized for lasting protection
- Fits all trailer tongues up to 3" wide by 4" high
- Extra heavy duty welded steel construction



**TIE 86098**

### Tie Down Engineering Spare Tire Carrier

Heavy duty steel carrier mounts both spare hub & spare tire

- Designed for UHI 1750# hub with 1-1/16" and 1-3/8" bearings
- Fits all trailer frames up to 3" wide and 4" high
- Security holes for optional cable & lock
- Includes 5 stud pre-greased hub w/ bearings



**TIE 86079**

### Fulton Fold-Away Hinge Kits

- Reduces trailer tongue length by up to 36"
- Install on existing trailer tongue
- Corrosion resistant zinc plated steel
- All mounting hardware included

**FUL HDPB330101** 3" x 3" tongue  
• Max gross trailer weight: 3,500 lbs

**FUL HDPB340101** 3" x 4" tongue  
• Max gross trailer weight: 6,000 lbs



### Fulton Boat Guides

Unique non-marring marine grade PVC. Universal mounting system fits all trailer frames up to 3" wide and 5" high.

**FUL GB440101** Height 44"

**FUL GB1500100** Height 50"



### Fulton Boat Roller Guides

Unique non-marring cushioned rollers prevent hull damage and scuffing. Exclusive Galva-Tech finish exceeds industry standard for corrosion protection. Stainless steel pins hold rollers in position to maintain hull contact under all loading conditions. Universal mounting system fits all trailer frames up to 3" wide and 5" high.

**FUL BGR200101** Height 20"



### Tie-Down Engineering Heavy Duty Guides

48"/60" high PVC pipe guides your boat on safely and gives you visual aid when backing an empty trailer. The non-marking PVC pipe is braced inside with metal tubing going 20" up into the tube, adding strength and impact resistance. All hardware is included and is hot dip galvanized for corrosion protection.

**TIE 86103**



**Fulton Ball Mounts**

Pins and clips sold separately. Use with most 2" x 2" square receivers. The mounts meet or exceed Vehicle Equipment Safety Commission and V-5 standards. Black powder coat finished. Handles ball shanks to 1".



Part #	Receiver	Drop	Colour
FUL 21342	2"	2"	Black
FUL 21344	2"	4"	Black
FUL 21346	2"	6"	Black
FUL 21287	2"	2"	Chrome
FUL 21288	2"	3"	Chrome
FUL 21289	2"	5-1/4"	Chrome

FUL 63240 5/8" pin set f/2" ball mounts

**Fulton Fas-Lok Straight Tongue Couplers**

Proven Fulton Fas-Lok locking levers hook up quickly and easily and feature a heavy duty safety latch and padlock hole. Designed for 1-7/8" or 2" ball sizes, Class I or Class II trailers with 2" or 3" tongue widths. Heavy zinc plated finish.



Part #	Fits Ball Size	SAE Class	Trailer GVW.lbs	Tongue Mount Width
FUL 11200-0101	1-7/8"	I	2,000	2"
FUL 11300-0101	1-7/8"	I	2,000	3"
FUL 22200-0101	2"	II	3,500	2"
FUL 22300-0101	2"	II	3,500	3"

**Fulton Chromed Hitch Balls**

Solid steel hitch balls are engineered to meet all safety requirements of VESC regulations V-5. When installing hitch balls: torque all" shank balls to 160 ft. lbs., all 1" to 250 ft. lbs., and 1-1/4" shank balls to 450 ft. lbs. Always use the properly rated hitch ball for your towing system.



Part #	Ball	Max. Trailer	Shank L x Dia
FUL 665105	1-7/8"	2,000 lbs	1-1/2" x 3/4"
FUL 63884	1-7/8"	2,000 lbs	2.38" x 3/4"
FUL 665205	2"	3,500 lb	1-1/2" x 3/4"
FUL 665215	2"	3,500 lb	2.38" x 3/4"
FUL 63896	2-5/16"	6,000 lb	2-3/4" x 1-1/4"

Parts:  
 FUL 58109 Reducer bushing, 1" to 3/4"

**Masterlock Padlock**

- 1-3/4" wide laminated brass body
- Brass construction offers maximum corrosion resistance
- Hardened steel shackle for extra cut resistance
- 4-pin tumbler cylinder helps prevent picking
- Ideal for marine and other harsh environments



MAL 2D

**Masterlock Padlock**

- 1-9/16" wide laminated brass body
- Brass construction offers maximum corrosion resistance
- Hardened steel shackle for extra cut resistance
- 4-pin tumbler cylinder helps prevent picking
- Ideal for marine and other harsh environments



MAL 4D

**Masterlock Padlocks**

- 1-9/16" (40mm) wide body
- 4 pin tumbler security
- Hardened steel shackle
- Solid brass lock body is stylish and strong



MAL 140D Each  
 MAL 140Q 4 Pack, keyed alike  
 MAL 140T 2 Pack, keyed alike

**Trimax Padlock**

Marine grade dual locking solid brass body lock with a hardened 1-1/8" x 5/16" diameter shackle.



TMX TPB1125

**Trimax Weatherproof Padlock**

Weatherproof laminated solid steel body lock with a dual locking  
 • 1-1/8" x 5/16" shackle



TMX TPW1125

**Masterlock Padlock**

- Common features:
- 4 pin tumbler security
  - Black finish, with matching coloured key head
  - Weather proof lock body
  - Hardened steel shackle
  - 1-9/16" wide



MAL 141D Each

**Masterlock Premium Combination Padlock**

- 2" (51mm) wide body
- Solid brass case
- Resettable to any of 10,000 personalized combinations

**MAL 175D****Trimax Resettable Combination Lock**

A resettable combination solid brass lock with 2" body and 1-1/4" x 5/16" diameter hardened shackle.

**TMX TPC125****Masterlock Shrouded Padlock**

- 2-3/4" wide S/S body
- Hardened steel shackle
- 4-pin cylinder helps prevent picking
- Double deadbolt locking
- Key retaining feature ensures padlock is not left unlocked
- Fully shielded design minimizes shackle exposure
- Ideal protection against bolt cutter attacks

**MAL 40DPF****Trimax Braided Cable**

Quadra Braid cable (15 feet long x 10 mm diameter) with dual loops

**TMX TDL1510****Trimax Versa Cable Lock**

A multi-use versa-cable lock featuring a Trimaflex cable 6 feet in length by 10mm diameter with a locking cinching feature.

**TMX VMAX6****Fulton Cable Lock**

- Multi-purpose cable lock
- 6' or 15' long, high strength, vinyl coated steel cable with locking pin
- Locking end threads through pre-formed loop in cable and secures into powder coated, heavy duty cast lock
- Includes two keys for end user convenience.

**FUL CLK15 0100 15'****Trimax LED Cable Lock**

- Push button LED illuminates combination lock for easy night use
- 12mm x 6' Trimaflex braide self coiling cable
- Includes quick release bracket

**TMX TRL126****Sea-Dog Two Piece Coupler Lock**

- Zinc, brass plated construction
- L: 1-11/16" x W: 1-13/16"
- Lock opening: 3/4"

**SED 751030-1****Sea-Dog Coupler Lock w/ Stainless Pin**

- Brass construction
- L: 2" x W: 1-1/2" x D:5/8"
- Lock opening: 9/16"

**SED 751020-1****Sea-Dog Coupler Locking Pin**

- Made from electro-galvanized steel
- L: 3" x W: 1-13/16"
- Pin diameter: 1/4"

**SED 751010-1****Masterlock Coupler Latch Lock**

Precision pin tumbler mechanism resists picking.

- Stainless steel construction
- Adjustable to 5/8", 1" & 2"

**MAL 2847DATSC****Masterlock Coupler Latch Lock**

- 3-1/2" long shackle barbell lock
- Precision pin tumbler mechanism resists picking

**MAL 1471DAT****Trimax Coupler Locks**

- 100% stainless steel
- Features 1/4 turn technology that cannot be false locked
- O-ring keeps water, grime and dirt out of locking mechanism
- Protective rubber cap protects keyhole
- Type A key which is a spring loaded, 7 pin, high security key. Resists attempted drill outs. Rugged and durable, the key will not bend or break.
- Also secures trailer door latches, cargo boxes and other types of doors

**TMX SXTC2** 2-1/2" span**TMX SXTC3** 3-1/2" span

### Trimax Universal Coupler Lock

- One size fits all: from 1-7/8", 2" to 2-5/16"
- Provides 360° of hardened steel protection
- Reinforced armoured shoulder guard resists hammer strikes and saw cuts
- Corrosion resistant finish
- Key hole cover protects from grime & dirt

**TMX UMAX50**

### Masterlock Universal Trailer Coupler Lock

- Fits 1-7/8", 2", and 2-5/16" couplers manufactured by Reese®, Fulton, Valley, Atwood®, Shelby, Putnam, Hammerblow, Dutton Lainson, and UFP.
- Advanced locking mechanism resists picking and prying
- Chrome finish protects against rust and corrosion

**MAL 379DAT**

### Trimax Premium Universal Coupler Lock

- One size fits all: from 1-7/8", 2" to 2-5/16"
- Large 6 tooth 3/8" locking lug system
- Provides 360° of hardened steel protection
- Ballistic nylon housing absorbs blows and provides weather protection
- Key hole cover slides closed to protect from dirt

**TMX UMAX100**

### Fulton Receiver/Coupler Lock Combo

Fits Class III & IV, 2 square receivers, includes 5/8 RL63 and BHLO, adjustable brass coupler lock (keyed alike).

**FUL RCLP63 0600**

### Masterlock Receiver/Coupler Lock Combo

- Stainless receiver and coupler locks
- Keyed alike
- Fits 5/8"

**MAL 1481DATSC**

### Trimax Receiver/Coupler Lockset

- Keyed alike set
- Combination of a T-3 5/8" receiver lock & TC1 7/8" span coupler lock
- No internal springs to seize or break
- Polished steel with stainless steel internal components

**TMX TM31**

### Trimax Receiver/Coupler Lock Sets

- Keyed alike set with a SXT3 5/8" receiver lock & span coupler
- 100% stainless steel
- Features 1/4 turn technology that cannot be false locked
- O ring keeps water, grime and dirt out of locking mechanism
- Protective rubber cap protects keyhole
- Type A key which is a spring loaded, 7 pin, high security key. Resists attempted drill outs. Rugged and durable, the key will not bend or break.



<b>TMX SXTM31</b>	7/8" span
<b>TMX SXTM32</b>	2-1/2" span
<b>TMX SXTM33</b>	3-1/2" span

### Masterlock Lock Set

- Keyed alike
- Coupler lock (2847DAT)
- Barbell receiver locks (5/8" & 1/2") (1473DAT)
- Coupler latch (7/8" width) (377DAT)
- Carrying case

**MAL 3774DAT**

### Masterlock Lock Set

- Keyed alike
- Coupler lock (379DAT)
- Swivel head receiver lock (5/8" & 1/2") 2866DATSC
- Coupler latch lock (2847DATSC)
- Carrying case

**MAL 3794DAT**

### Trimax Watercraft Bow Ring Lock

- Watercraft bow ring lock 1/2" diameter pin
- Fits bow rings with 5 1/2" span
- Features a triple plated chrome finish

**TMX T6**

### Trimax Receiver Lock

- Easy 1/4 turn operation
- Made of chrome plated machine hardened steel
- Large 1/4" dual lock lugs prevent false locking
- Integral O-ring and water tight cap seals out dirt and corrosion



<b>TMX TR125</b>	1/2" pin for class II receivers
<b>TMX TR200</b>	5/8" pin for class III, IV & V receivers

### Trimax Universal Receiver Lock

- Universal fit, steel locking mechanism & stainless steel shaft pin cover
- Fits 1/2" & 5/8 receivers
- Weather seal cap

**TMX TS32**

### Trimax Universal Receiver Lock

- 100% stainless steel construction
- Universal fit
- Fits 1/2" & 5/8 receivers
- Weather seal cap

**TMX SXTS32**

### Trimax Anti-Rattle Receiver Pin

The TAR300 5/8" locking receiver pin with an anti-rattle pin. Features a chrome finish and hardened steel.

- Includes 2 keys
- Includes wrench for installation
- The 5/8" fits all Class III, IV and V receiver hitch
- Receiver pin easily adjusts for tight fit
- O-ring keeps water, grime and dirt out of locking mechanism
- Protective rubber cap protects keyhole
- Type A key which is a spring loaded, 7 pin, high security key. Resists attempted drill outs. Rugged and durable, the key will not bend or break.

**TMX TAR300**

### Trimax Receiver Pins

- O-ring keeps water, grime and dirt out of locking mechanism
- Protective rubber cap protects keyhole
- Type A key which is a spring loaded
- 7 pin, high security key
- Resists attempted drill outs
- Rugged and durable, the key will not bend or break

**TMX SXT3**

5/8" Class III &amp; IV (2-5/8")

**TMX SXT5**

5/8" Class V extended width (3-1/4")

### Trimax Premium Receiver Lock

- Large 1/2" dual lock lugs prevent false locking
- Internal O-ring & water tight cap helps to seal out dirt & corrosion
- Machined from solid stainless steel
- No internal springs to seize up or break
- Easy 1/4 turn operation
- Tested to 40,000 lbs

**TMX T3**

### Masterlock S/S Receiver Lock

5/8" & 1/2" barbell lock.

- Hardened receiver pins for increased sheer strength
- Precision 4-pin tumbler mechanism resists picking
- Key retaining for increased safety

**MAL 1480DAT**

### Trimax Coupler Lock

- Secures couplers with up to a 7/8" span
- Easy 1/4 turn locking
- Hardened steel 1/4" pin
- Internal O-ring and weather proof cap to seal out dirt
- Protective rubber cover on body prevents noisy rattle & abrasion

**TMX TMC10**

### Trimax Coupler Lock

- Adjustable coupler lock
- Fits Couplers from 7/8" to 3-1/2" spans

**TMX TC123**

### Trimax Spare Tire Lock

- Secures both spare tire & tire bracket to welded frame member.
- (Round key) 36" x 12 mm

**TMX ST30**

### Trimax Wheel Chock Locks

- Quick and easy installation
- Locks and chocks wheel for roll prevention
- Rubber coated arms protect wheel finish
- Heavy gauge powder coated construction

**TMX TCL65**

Closed: 6", Open: 10.5", Reach: 7.25"

**TMX TCL75**

Closed: 7", Open: 11.25", Reach: 10.5"

### Trimax Tire Nut Locks

- A quick and easy solution to tire theft
- Locks over the tire nut preventing removal

**TMX TNL740**

### CIPA Hitch Receiver Cover

Each kit comes complete with 2 metal receiver tubes (1-1/4" & 2"), 2 pull pins and a security padlock.

**CIP 60011**

**Adventure 8000 Stand-Offs**

Made of high grade 1/2" diameter 6061-T6 aluminium alloy, electrostatically white powder coated. All end fittings stainless steel.

- ADV 8000-18**      18"
- ADV 8000-24**      24"
- ADV 8000-30**      30"
- ADV 8000-36**      36"



**Endurance Universal Davit System**

- For inflatables up to 90 kgs and 300 cm in length
- Made of PVC & S/S
- Sold by the pair

**END DH-1**

\*Glue not included\*



**Davis Instruments Wheel-A-Weigh Launching Wheels**

Wheel-a-Weigh® launching wheels for small boats and car toppers ride in tracks permanently installed on the transom. Wheels lock in the "down" position for transporting overland. After launching, they lock in the "up" position. Wheels are easily removed for storage or theft prevention. These units are made of anodized marine aluminum and stainless steel with injection molded wheels.

Two Models:

**DIN 1461**

- Double hard-rubber tires
- Wheel dimensions: 8 x 1.5"
- Weight capacity: 250 lbs (113 kg) on hard surfaces, 100 lbs (45 kg) in soft sand



**DIN 1481**

- Extra capacity
- Fully pneumatic tires
- Wheel dimensions: 16 x 4.0"
- Weight capacity: 300 lbs on hard surfaces, 200 lb. in soft sand

Parts:

- DIN R1461B**      5/16" x 2" quick release pins
- DIN R1461A**      Replacement transom track



**Garelick Boat Dolly**

Helps to move and roll small fishing boats with ease. Clamps securely to the transom. Turn boat with keel up and roll it wherever desired. Utilizes 1" sturdy zinc plated steel and 4 - 7" rubber tired wheels mounted on 1/2" zinc plated steel axle. Ideal for moving boats from cars to water, at lake homes, campsites and resorts.

- Maximum weight: 250 lbs

**GAR 71050**



**Adventure Quick Release Launching Wheels**

Wheels lock into upper and lower position by simply snapping the spring loaded locking mechanism into place. No pins to pull or worry about to raise or lower wheels. Designed for inflatables, aluminum and hard shell boats. Launch the boat by yourself comfortably with Quick-Release Launching wheels. Designed to be moved into the raised position after launching or to be totally removed after launching by simply pulling a quick release pin. Heavy-duty 4" X 16" pneumatic tire and solid one-piece injection molded rim.

- Recommended max. weight 300 lbs
- Tire pressure 30 lbs

**ADV 2100**



**Adventure EZ-Roller Launching Wheels**

Designed for inflatables, aluminium and hard shell boats. Launch the boat by yourself comfortably with EZ-Roller Launching Wheels. Designed to be moved into the raised position after launching or to be totally removed after launching by simply pulling the quick release pins. No tools required. Heavy-duty 4" x 16" pneumatic tire and solid one-piece injection molded rim. Constructed of marine grade aluminium, anodized for long life, all stainless steel fasteners. Mounting fasteners supplied.

Use U-channels mounted on transom of boat as pattern to drill holes in transom. Easy installation, with S/S fasteners supplied.

- Recommended max. weight 300 lbs
- Tire pressure 30 lbs

**ADV 2000**

Launching wheels

**ADV 009-2000**

Replacement axle bushing

**ADV 010-2000**

Replacement wheel spacer



**Davis Instruments Small Boat Dolly**

Adjustable to fit rowing shells, pulling boats and canoes, as well as small sailboats and dinghies. This dolly is constructed of heavy duty anodized aluminum tubing and polypropylene struts with santoprene rubber-covered bunks. The bunks are injection molded, 19" long x 3" wide (48.3 x 7.6 cm). The holding straps provided are fitted with delrin quick release buckles. Wheel spacing is 37" (94 cm). Bunk spacing is adjustable to 18 or 28" (46 or 71 cm). A fold-away foot rod holds the dolly upright to facilitate single-handed loading. Easily broken down for transport.

- Extra capacity
- Fully pneumatic tires
- Wheel Dimensions: 16 x 4"
- Weight Capacity: 250 lbs on hard surfaces, 150 lbs in soft sand

**DIN 1465**

Small boat dolly



### Megaware KeelGuard Protection

Manufactured from polycor, which offers superior abrasion and corrosion resistance. Greatly reduces costly repairs. Each kit contains KeelGuard, 3M VHB adhesive, burnishing tool, 3M Scotchbrite pad, 3M #94 primer, and full instructions. Installs in minutes.

The model 102 is 5 inches wide and designed for boats 16 feet and above. It is also recommended for all personal watercraft.

<b>MKG 102-4'ALMOND</b>	5" x 4'
<b>MKG 102-4'WHITE</b>	5" x 4'
<b>MKG 102-5'WHITE</b>	5" x 5'
<b>MKG 102-6'BLACK</b>	5" x 6'
<b>MKG 102-6'WHITE</b>	5" x 6'
<b>MKG 102-6'GREY</b>	5" x 6'
<b>MKG 102-6'ALMOND</b>	5" x 6'
<b>MKG 102-7'WHITE</b>	5" x 7'
<b>MKG 102-7'ALMOND</b>	5" x 7'
<b>MKG 102-8'WHITE</b>	5" x 8'
<b>MKG 102-8'ALMOND</b>	5" x 8'
<b>MKG 102-8'BLACK</b>	5" x 8'
<b>MKG 102-9'WHITE</b>	5" x 9'
<b>MKG 102-9'ALMOND</b>	5" x 9'
<b>MKG 102-10'WHITE</b>	5" x 10'
<b>MKG 102-12'WHITE</b>	5" x 12'



#### For Most Boats:

Measure from a point on the bow 6" above the waterline to at least 2 ft. beyond the lowest point of the keel.

#### For PWC's:

Measure from the bow eye to a point 4" to 6" forward of the jet intake grate.

### Megaware KeelGuard Bowguard

Stainless steel bowguard protects your gelcoat from bow rollers and trailer scuffs. Using 3M pressure sensitive adhesives, bowguard installs in minutes.

<b>MKG SB-637</b>	Solid, 5.75" x 4.5"
<b>MKG 80637</b>	Solid extra large, 9" x 8.75"
<b>MKG SB-638</b>	Notched, 5.75" x 4.5"



### RockGARD Boat Protection

Patented hull protection device that eliminates road-tar and damage caused by rocks and road debris. Easy to install and remove for safe access when boat launching.

- Zinc plated steel hardware
- 100% polyester mesh with UV resistant PVC black coating
- One year warranty



<b>ROC SEADOBLK</b>	Seadoo
<b>ROC SMALLBLK</b>	Small 27"
<b>ROC MEDIUMBLK</b>	Medium 33"
<b>ROC LARGEBLK</b>	Large 39"

TRAILERING

### Panther Transom Saver

- Motor support saves your transom during trailering

The transom saver adjusts from 26" to 56" to reach where others won't on hard to access trailer crossbars, that extend under the boat. Comes with easy to install bracket attachment and 10" rubber bungee. Fits most popular brands of trailers and is easily removed for loading and unloading.

**PAN 55-1900**



### Garelick Motor Tilt

Helps tilt motor back safely without strain. Lightweight. Compact. Made of 1" diameter anodized aluminum tubing. Good for motors up to 40 hp.

**GAR 71036**



### Springfield Motor Support

- Adjusts from 26" to 56"
- Made for those hard to reach crossbars that extend under the boat
- Easy to install with included bracket attachment

**SPR 1780250**



### Davis Motor Caddy Harness

This handy item securely attaches to outboards, providing a safe and secure handle for carrying, hoisting, and moving heavy, outboard motors. Made of tough marine grade and UV-rated materials, this harness is designed to remain on the motor permanently. It is, however, easily removed, allowing quick access to the motor. One size works on virtually all 2 - 15 hp outboards.

**DIN 430**



### Garelick Motor Carrier

A convenient and effortless way to move outboards. Made with 1" alloy reinforced aluminum tubing and semi-pneumatic rubber tires mounted on a sturdy axle. Has a fold-down gas can holder with tie-down strap. Accommodates long shaft motors and folds for storage.

**GAR 31600** Max. 30 hp, 130 lbs



**Hardline Products Stick On Numbers & Letters**

The industries most Popular 3" style letters and numbers. The Dyer style has become the standard for die-cut decals.

- Meets USCG Regulations
- Durable waterproof black or white vinyl
- Laminated for fade and fuel resistance
- Individually bar coded
- Self-aligning alignment



**Black Letters**

**DYE 3-SCB-P-(# or letter)**

Example: to order the letter 'B' order **DYE 3-SCB-P-B**

**White Letters**

**DYE 3-SCW-P-(# or letter)**

Example: to order the letter 'B' order **DYE 3-SCW-P-B**

**Hardline Products Display Kit**

22" x 24" hardboard display panel with plastic pockets that comes complete with 10 of each letter and 10 of each number in a solid black die cut vinyl.



**DYE 2B-P**

**Hardline Products Stick On Letter Kits**

- 144 - 3" Letters & numbers in a single consumer pkg
- 4 of each letter and number
- Letter a boat, PWC, snowmobile, car, truck, mailbox, etc



- DYE BLK350EC** Black
- DYE BLU350EC** Blue
- DYE RED350EC** Red
- DYE WHI350EC** White

**TH Marine Cooler Mounting Kit**

Kit includes four corner brackets and two hold down straps. This kit is designed to prevent unwanted cooler movement on your deck. Made from U.V. resistant materials and comes with all mounting hardware including screws. Fits virtually all coolers including Igloo.



**THM CMK-1-DP**

**Scepter Storage Totes**

These storage containers are the perfect answer to your organisational needs. They are made from tough food grade polyethylene. They are rustproof, dent proof and withstand temp. changes. They are the safest, heavy wall containers available for shipping, storage, moving, shelving and other general requirements.



- SCE 71216R** Senior tote (19 gal) 24" x 20-1/8" x 12-3/8"
- SCE 71217R** Senior tote lid
- SCE 1199** Hinged lid container (23 gal) 24" x 20" x 11-3/4"